

B26 PURETIC POWERBLOCK



26B Powerblock with Open Sideshell Design

Hydraulic Motors:

B26 Powerblocks are available with a choice of 6 sizes of motors including two sizes of 2 speed motors. We can size the motor to your hydraulic system based on your requirements for speed or pull. All hydraulic motors are now marinized for longer service life.

Exceeding recommended hydraulic flow requirements of hydraulic motor can result in failure of shaft seal and internal damage to the hydraulic motor resulting in premature failure of motor. Maximum

recommended hydraulic flow is 45 GPM @ 2000 PSI.

Powergrip:

The yoke mounted Powergrip helps keep the net square when hauling, increasing traction and control of the net in rough weather.

Powergrip motors and hydraulic cylinders are marinized for longer service life. Our Powergrip tire assemblies have galvanized rims with aluminum covers for long service life in a saltwater environment and are available in a number of different styles, heights and widths to customize the Powergrip based on your net size and fishery.

Hydraulic Swivel:

Rotate your powerblock 360 degrees. The load bearing hydraulic swivel option allows the powerblock to easily haul port or starboard without binding the hydraulic hoses




Bolt in Cleated Sheave:

Replaceable cleats are currently available in Rubber, Aluminum or Polyurethane.



| Model | Weight LBS | Height Inches |
|--------------------------------|------------|---------------|
| B26B Plain | 340 | 53 |
| B26B With Powergrip | 500 | 54 |
| B26B With Powergrip and Swivel | 615 | 60.5 |

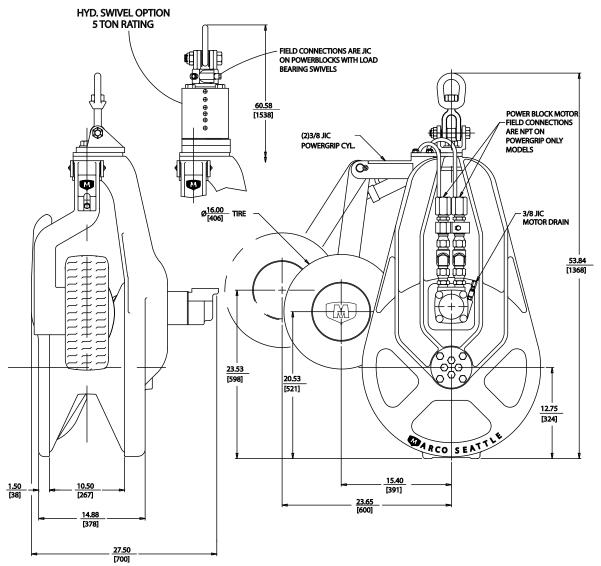

| Model | Sheave Speed | | Net Pull | Hydraulic Oil Input * | |
|-----------------------------|--------------|-----------|---------------|-----------------------|--------------|
| | FPM | RPM | @ 1/2 Radius | Flow GPM | Pressure PSI |
| B26B - 015 - B9926J-SWL | 173 | 42 | 4013 | 17 | 2000 |
| B26B - 019 - B9926J-SWL | 178 | 43 | 5066 | 22 | 2000 |
| B26B - 024 - B9926J-SWL | 174 | 42 | 6020 | 27 | 2000 |
| B26B - 030 - B9926J-SWL | 174 | 42 | 7608 | 34 | 2000 |
| B26J - 016/024 - B9926J-SWL | 262H / 174L | 63H / 42L | 4265H / 6020L | 27 | 2000 |
| B26J - 020/030 - B9926J-SWL | 264H / 174L | 63H / 42L | 5300H / 7608L | 34 | 2000 |

^{*}Maximum recommended continuous hydraulic flow is 45GPM @ 2000 PSI

Sheave capacity is 30 inches of compact net circumference

Smith Berger Marine, Inc.

7915 10th Ave. S., Seattle, WA 98108 USA
Tel. 206.764.4650 - Toll Free 888.726.1688 - Fax 206.764.4653
E-mail: sales@smithberger.com - Web: www.smithberger.com